

Freeze-Pak™ with FP-FLEX™

An Aseptic Solution for Cryogenic Applications


- Bio-containers with integrated tubing designed for cryogenic storage and transport
- Used in closed-system processing steps

Benefits

- DEHP-free options available (Versions A and C)
- Tubing and containers tested and validated to -196°C
- Post-thaw aseptic transfer via tube-to-tube connection
- Designed for storage using compatible freezing cassettes
- Reduces handling and seed train expansion steps
- FP-FLEX tubing compatible with C-FLEX® 374 using Terumo SCD® IIB sterile tube welder (inquire for information on other tubing combinations)



Freeze-Pak™ Film

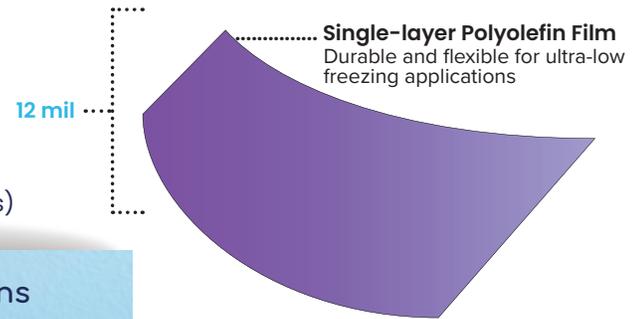

Standard Applications

- Intermediate frozen product storage
- Working cell banks
- Regenerative medicine

Customizable Options

- Connections
- Tubing
- Freeze-Pak™ with FP-FLEX can be used within a custom manifold design

Ordering Information

Catalog #	Description	Optimal Volume at -196°C	Case Qty
DEHP-free			
FP-FLEX50A	50 mL max fill volume, (2) FP-FLEX™ lines (8" L; 1/8" ID x 1/4" OD), sealed	10 – 30 mL	25
FP-FLEX250A	250 mL max fill volume, (2) FP-FLEX™ lines (8" L; 1/8" ID x 1/4" OD), sealed	30 – 70 mL	25
FP-FLEX500A	500 mL max fill volume, (2) FP-FLEX™ lines (8" L; 1/8" ID x 1/4" OD), sealed	55 – 100 mL	25
FP-FLEX750A	750 mL max fill volume, (2) FP-FLEX™ lines (8" L; 1/8" ID x 1/4" OD), sealed	80 – 190 mL	25
FP-FLEX1000A	1000 mL max fill volume, (2) FP-FLEX™ lines (8" L; 1/8" ID x 1/4" OD), sealed	180 – 380 mL	25
FP-FLEX50C	DEHP-free; 50 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	10 – 30 mL	25
FP-FLEX250C	DEHP-free; 250 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	30 – 70 mL	25
FP-FLEX1000C	DEHP-free; 1000 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	180 – 380 mL	25
Made with DEHP			
FP-FLEX50B	50 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	10 – 30 mL	25
FP-FLEX250B	250 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	30 – 70 mL	25
FP-FLEX500B	500 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	55 – 100 mL	25
FP-FLEX750B	750 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	80 – 190 mL	25
FP-FLEX1000B	1000 mL max fill volume, (1) FP-FLEX™ line (8" L; 1/8" ID x 1/4" OD), sealed; 1 EVA line with 2 PVC leads (4" L; 0.118" ID x 0.160" OD) and female luers	180 – 380 mL	25

Film Physical Test Data (pre-gamma irradiation)

Property	Test Protocol	Typical Value(s)
Tensile Strength at Break, MD/TD (psi)	ASTM D882	3,200/2,900
Elongation at Break, MD/TD (%)	ASTM D882	650/700
Modulus at 100% Elongation, MD/TD (psi)	ASTM D882	550/500
Tear Resistance, MD/TD (lbf/in.)	ASTM D1004	200/250
Low Temp. Brittleness (Masland) (°C)	ASTM D1790	Below -100
Glass Transition Temperature (T _g)	DSC	-48°C
Specific Gravity (g/cm ³)	ASTM D792	0.92
Particulates	USP <788>	Pass
Oxygen Transmission Rate (cm ³ /M ² /24 hrs @ 23°C, 0% RH)	ASTM D3985	2,200
Carbon Dioxide Transmission Rate (cm ³ /M ² /24 hrs @ 23°C, 0% RH)	ASTM F2476	9,000
Moisture Vapor Transmission (g/M ² /24 hrs @ 23°C)	ASTM F1249	3.9

Test performed on 0.014" film

FP-FLEX™ Physical Test Data (pre-gamma irradiation)

Property	Test Protocol	Typical Value
Specific Gravity (g/cm ³)	ASTM D792	0.89
Tensile Stress 100% Strain (MPa)	ASTM D412	2.41
Tensile Strength – Break (MPa)	ASTM D412	7.93
Tensile Elongation – Break (%)	ASTM D412	700
Tear Strength (kN/m)	ASTM D624	41.2
Durometer Hardness – (Shore A)	ASTM D2240	55
Brittleness Temperature (°C)	ASTM D746	-60

Final Container Biocompatibility Test Data (post-gamma irradiation)

Property	Test Protocol	Typical Value
USP Class VI	USP <88>	Pass
Cytotoxicity	USP <87>/ ISO 10993-5	Pass
Hemolysis	ISO 10993-4	Pass

Post Freeze-Thaw Welding FP-FLEX™ to C-FLEX®*

Property	Test Protocol	Typical Value
Integrity	Pressure leak test (1 psi)	21 Samples/Pass
Flow Rate	Weld junction flow rate ≥ 500 mL/minute	21 Samples/Pass
Weld Strength	Freeze/thaw FP-FLEX welded to C-Flex	Avg.=12.85 lbf



Contact us today at www.chartermedical.com

* FP-FLEX™ (1/8" ID X 1/4" OD) welding to C-Flex® 374 completed with the Terumo SCD(reg) IIB sterile tube welder

Freeze-Pak™ and FP-FLEX™ are trademarks of Charter Medical, LLC.

C-FLEX® is a registered trademark of Saint-Gobain.

All data and statements concerning these products may be considered as being indicative of representative properties and characteristics obtainable. We make no warranty, express or implied, concerning actual use or results because of industry-specific influences.